

Suzuki TM-250J Champion

Length..... 84.5"
 Width..... 34.3"
 Height..... 45.7"
 Wheel Base..... 55.8"
 Ground Clearance... 8.5"
 Dry Weight..... 220 lbs.
 Engine Type..... 2-stroke air-cooled

Bore & Stroke..... 2.76" x 2.52"
 C.C..... 246
 Compression Ratio.. 7.5:1
 Carburetor..... VM34
 Maximum Output... 30 hp/75000 rpm
 Maximum Torque... 21.0 ft.-lbs./

Ignition System.... PEI (Pointless
 Electronic Ignition)

Transmission..... 5-speed,
 constant mesh

Clutch..... Multi-plate,
 wet disc

Starter..... Primary Kick

Brakes: Front..... Right hand,
 internal expanding,
 single leading

Rear..... Right foot,
 internal expanding

Suspension: Front... Telescopic,
 oil-dampened

Rear..... Swinging arm,
 oil-dampened,
 5-way adjustable

Front Fork Travel... 7.1"

Tires: Front..... 3.00-21 4PR, Full Knobby

Rear..... 4.00-18 4PR, Full Knobby

Color..... Aspen Yellow

Fuel Tank Capacity.. 2.4 gals.

Oil Tank Capacity... 2.3 pts.

Climbing Ability... 38°

Available after February 1972

All prices and specifications subject to change without notice.

SUZUKI OF SOMERVILLE, INC.
 25 - 29 DAVENPORT STREET
 SOMERVILLE, NEW JERSEY 08876
 (201) 526-3434

High tune competition muffler

Number plates

Aluminum alloy rims

High impact
 polyurethane fenders

21" front wheel

5-way adjustable rear shocks

Single leading shoe front brakes

Primary kick starter

CCI automatic lube

Bead stoppers



The TM-250J model is
 expressly excluded from
 any Suzuki warranty


Suzuki: built to take on the country.

U.S. Suzuki Motor Corporation, Santa Fe Springs, California 90670

Suzuki TS-250J Savage

Length.....84.3"
 Width.....35.1"
 Height.....44.3"
 Wheel Base.....55.8"
 Ground Clearance.....9.8"
 Dry Weight.....245 lbs.
 Engine Type.....2-stroke air-cooled
 aluminum single cylinder
 Bore & Stroke.....2.76" x 2.52"
 C.C.....246
 Compression Ratio 6.7:1
 Ignition.....PEI (Pointless
 Electronic Ignition)
 Carburetor.....VM28
 Maximum Output...23 hp/6500 rpm
 Maximum Torque...19.4 ft.-lbs./
 5500 rpm
 Speed Range.....75-80 mph
 Transmission.....5-speed constant mesh
 Clutch.....Multi-plate, wet disc
 Starter.....Primary kick
 Brakes: Front.....Right hand, internal expanding
 Rear.....Right foot,
 internal expanding
 Suspension: Front...Telescopic,
 oil-dampened
 Rear...Swinging arm,
 oil-dampened,
 5-way adjustable
 Front Fork Travel...6.5"
 Tires: Front.....3.25-19 4PR Trials
 Rear.....4.00-18 4PR Trials
 Color.....Strip Orange
 Daytona Blue
 Fuel Tank Capacity 2.6 gals.
 Oil Tank Capacity...2.2 pts.
 Instruments.....Speedometer/
 Tripmeter,
 Tachometer
 Climbing Ability....35°

Famous 12 month/12,000 miles warranty*

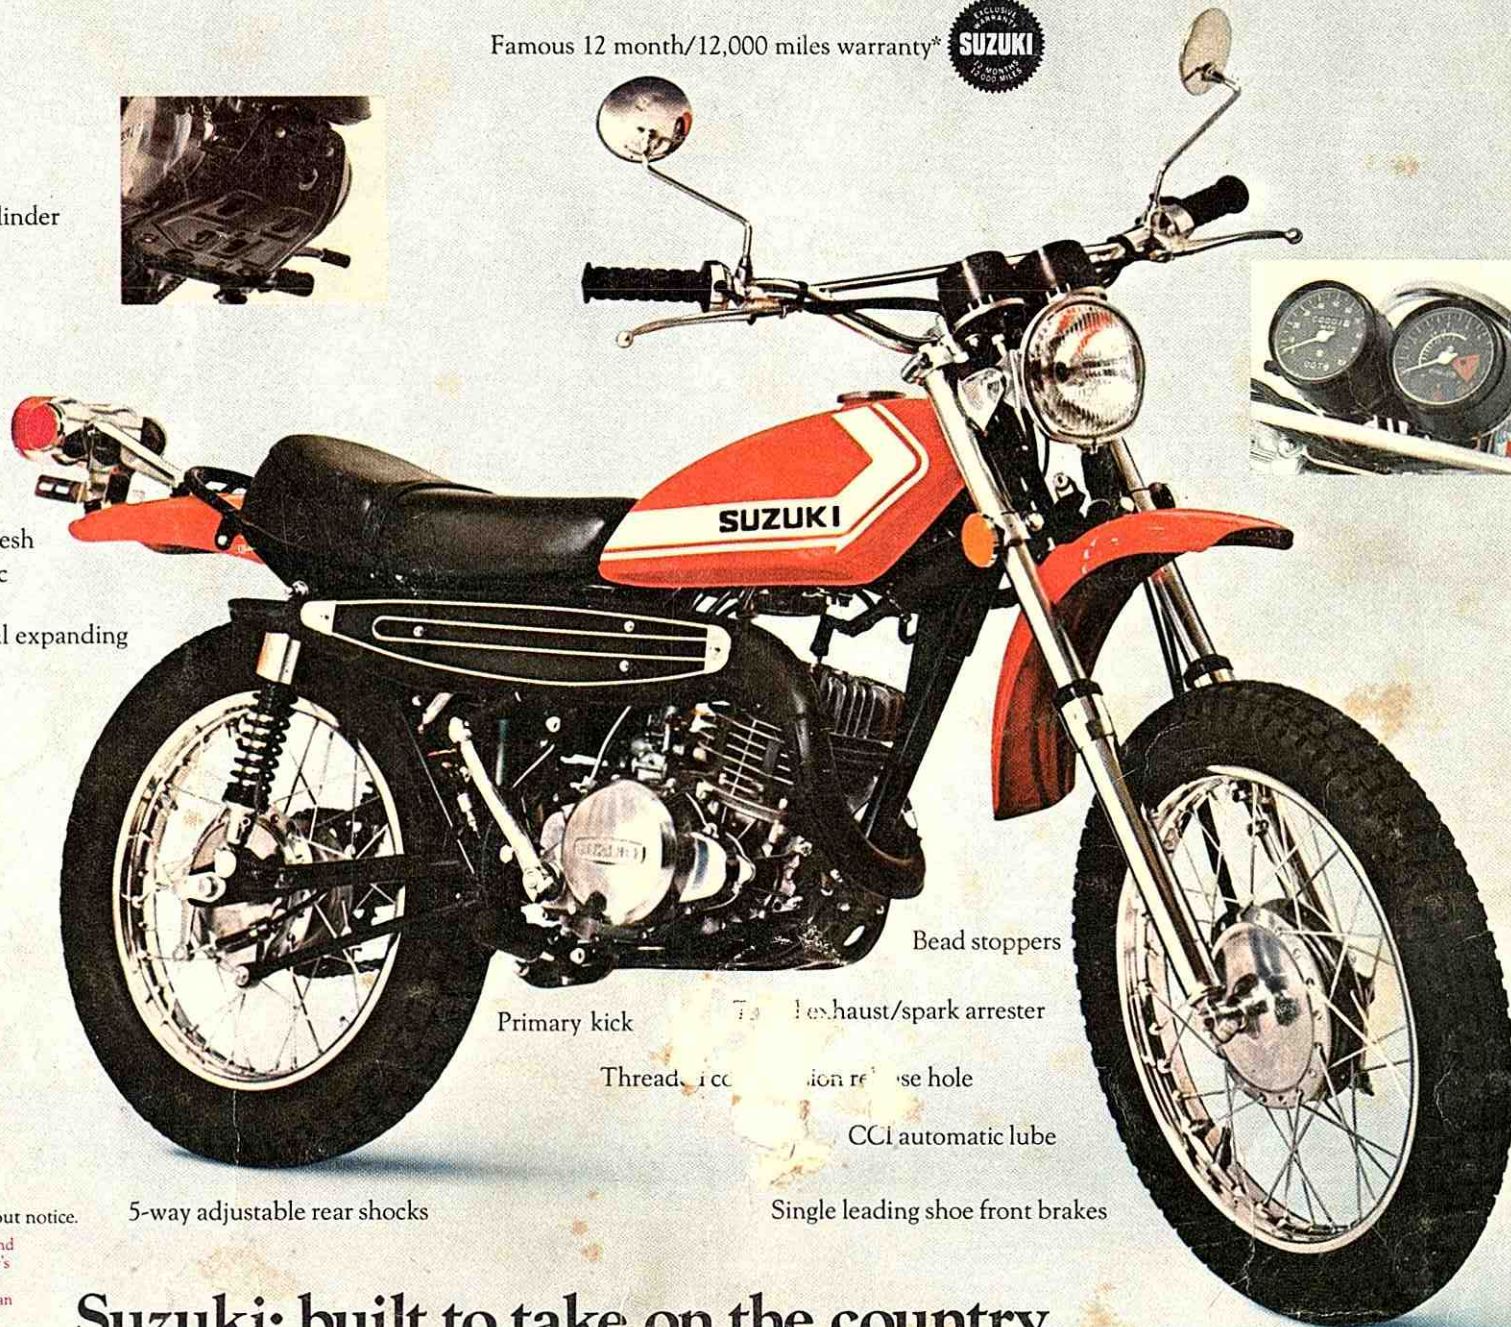

Bead stoppers

Primary kick

Exhaust/spark arrester

Thread, oil filler hole

CCI automatic lube

5-way adjustable rear shocks

Single leading shoe front brakes

All prices and specifications subject to change without notice.



*Covers all internal parts of cylinder head, block and transmission. Purchaser must comply with Owner's Manual Instructions: mail registration to Suzuki within 48 hours, and receive service checks from an authorized Suzuki dealer at 750, 2,000 and every 2,000 miles thereafter during warranty period.

Suzuki: built to take on the country.

U.S. Suzuki Motor Corporation, Santa Fe Springs, California 90670